


### Model B timestep = 6

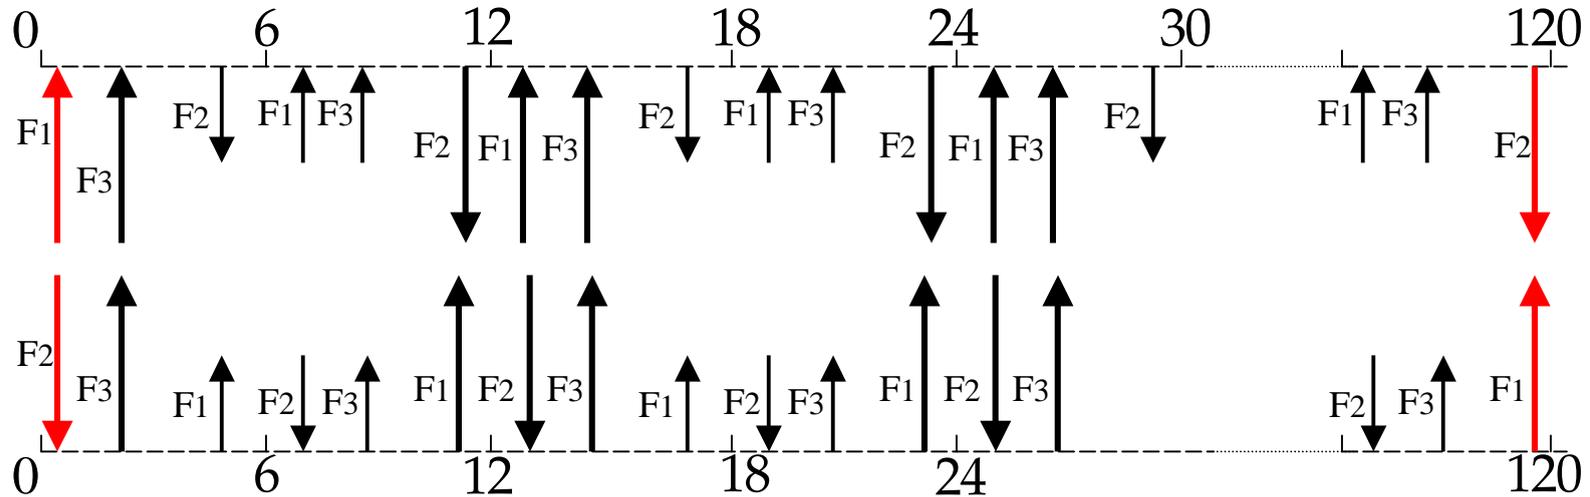

### Model A timestep = 6

$Cpl\_period(F1) = 12$
$Cpl\_period(F2) = 12$
$Cpl\_period(F3) = 12$
$LAG(F1) = 6$
$LAG(F2) = 6$
$LAG(F3) = 0$

- prism\_put\_proto/prism\_get\_proto leading to writing/reading to/from coupling restart file
- prism\_put\_proto/prism\_get\_proto leading to sending/receiving actions
- prism\_put\_proto/prism\_get\_proto NOT leading to sending/receiving actions